

09/28/99
Jc490 U.S. PTO

Please type a plus sign (+) inside this box ☐

PTO/SB/05 (1/98)
Approved for use through 9/30/00, OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 99AB133
First Inventor or Application Identifier William J. Mayer et al.
Title GROUNDED ISOLATION SYSTEM
Express Mail Label No. EJ80072468608

APPLICATION ELEMENTS

See MPEP Chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

- 1 ☒ Fee transmittal Form
(Submit an original and a duplicate for fee processing)
- 2 ☒ Specification [Total Pages 25]
(preferred arrangement set forth below)
- Descriptive title of the invention
 - Cross References to Related Applications
 - Statement Regarding Fed Sponsored R&D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
- 3 ☒ Drawing(s) (35 USC 113) [Total Sheets 5]
4. Oath or Declaration [Total Pages 3]
- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from prior Application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
- [Note Box 5 below]
- i. ☐ DELETION OF INVENTOR(S)
Signed Statement attached deleting inventor(s) named in prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
- 5 ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference herein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
- a. ☐ Computer readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement Verifying identity of above

ACCOMPANYING APPLICATION PARTS

- 8 ☒ Assignment Papers (cover sheet & documents)
- 9 ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(where there is an assignee)
- 10 ☐ English Translation Document (if applicable)
- 11 ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
- 12 ☐ Preliminary Amendment
- 13 ☒ Return receipt postcard (MPEP 503)
(Should be specifically itemized)
- 14 ☐ *Small Entity Statement filed in prior application
Statement(s) ☐ Status still proper and desired
- 15 ☐ Certified copy of priority Document(s)
(if foreign priority is claimed)
- 16 ☐ Other:
- * A new statement is required to pay small entity fees, except where one has been filed in a prior application and is being relied upon

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application no. _____
Prior application information: Examiner: _____ Group/Art Unit: _____

18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

or ☒ Correspondence address below

(Insert Customer No. or Attach bar code label)

NAME	John J. Horn				
	Patent Dept. 704P, 8th Floor, T-29				
ADDRESS	Allen-Bradley Company, LLC				
	1201 S. Second Street				
CITY	Milwaukee	STATE	WI	ZIP CODE	53204-2496
COUNTRY	USA	TELEPHONE	(414) 382-3960	FAX	(414) 382-3900

Name (Print/Type)	John M. Miller	Registration No. (Attorney/Agent)	38,560
Signature	<i>John M. Miller</i>	Date	Sept. 28, 1999

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

4434559 110003.96733

Docket No. 99AB133

Patent Application For:

GROUNDING ISOLATION SYSTEM

by

William J. Mayer

Douglas Cleerehan

David Fisher

Milan Damjanovich

Express Mail Mailing Label Number #EJ800724686US

Date of Deposit 9/28/99

Pursuant to 37 C.F.R. § 1.10, I certify that I am personally depositing this paper or fee with the "Express Mail Post Office to Addressee" service of the United States Postal Service on the above date in a sealed envelope (a) having the above-numbered Express Mail label and sufficient postage affixed, and (b) addressed to: BOX PATENT APPLICATION, Commissioner of Patents and Trademarks, Washington, DC 20231.

Date: 9/28/99 Kathleen B. Heberlein
Kathleen B. Heberlein

GROUNDING ISOLATION SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

Not applicable.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

5 Not applicable.

BACKGROUND OF THE INVENTION

662250" 5242450
The present invention relates to isolation systems for electrically isolating access points on a machine and more particularly relates to an isolation configuration which uses safety relays and switches which
10 redundantly isolate and ground an electrical system during lock-out conditions.

An exemplary automated manufacturing line may include several hundred electrically powered devices arranged in device sets at separate manufacturing stations, a separate manufacturing process performed by each
15 device at each station. For example, the devices may include robots, drills, mills, transfer lines, clamps, mixing machines, stuffing machines, drying machines and so on, each of which is linked to one or more loads such as motors for driving the devices through required movements and processes.

While the inventive configuration is meant to be used with many
20 different line arrangements and device groupings, to simplify the present explanation the invention will be described in the context of an exemplary assembly line 300 for, referring to Fig. 4, manufacturing widgets wherein the line includes devices arranged at ten consecutive stations 302, 304, 306, 308, 310, 312, 314, 316, 318 and 320 and wherein each station includes a plurality
25 of devices (not separately illustrated) which cooperate to perform a complete

process. A conveyor 322 or other mechanism powered by a motor 321 moves work items (not illustrated) from one station to the next. In many cases a conveyor will be 3000 or more feet long and may require more than a single motor to facilitate conveyance. In addition, as is standard in the industry, a single master controller including a master control panel 324 is provided to control and monitor the entire manufacturing process. To this end, panel 324 includes, among other things, miscellaneous controls 350 and a master or main disconnect 334. The master control panel 324 is provided to control voltages on supply lines 326 which pass through the controller and run along the entire packaging line to each of stations 302 through 320 and to a variable frequency drive (VFD) 328 which controls motor 321. To control station power, disconnect 334 links lines 326 to station controls 330.

When designing a manufacturing or processing line one of the primary considerations is line safety as many of the devices at each line station may inflict injury to an operator in the station vicinity. Typical injuries including mechanical injury (e.g., falling, crushing, puncture, etc.). For this reason many stations, and in some cases all stations, will be enclosed in a housing assembly to ensure that an operator does not inadvertently enter a potentially hazardous station environment. Hereinafter an exemplary enclosure will be referred to as a station and the station or device grouping therein will sometimes be referred to as a hazard to indicate the potential danger associated therewith.

Despite painstaking design of the processing line stations and of the control method associated therewith, often processing problems can occur which require operator intervention to alleviate the problems. For example, in the case of the exemplary processing line described above, assume that a riveting station 302 or hazard is set up to fire rivets into work items as the items are transferred therethrough. If a work item becomes jammed between station devices the item may cause a backlog of work items at the station and, possibly cause additional jamming. In this case, to eliminate the jamb, an operator would have to enter station 302 and physically remove the jamb.

To facilitate operator intervention, typically line access points are provided. In the present example, it will be assumed that a cage is formed

about riveting station 302 and that an opening there into is formed in the cage.

To ensure that an operator entering a station via an access point is not injured, standard practice within the industry requires that power to the station
5 be entirely cut off via a power down mechanism. By cutting off power to the station, all station devices cease mechanical movement and the possibility of injury is essentially eliminated.

Referring still to Fig. 4, primitive and still prevalent power down mechanisms include a master or main disconnect switch 334 linked to the
10 master control panel. To cut power, switch 334 is tripped which causes power to the entire line to shut down. Because the master control panel 324 is often remote (e.g., perhaps 3000 feet) from some line stations, it is always possible that a second operator may reclose disconnect switch 324 while a first operator is within a station thereby causing a potential hazard. To
15 eliminate this possibility the industry has configured standard lockout disconnect switches and has devised standard lockout-tag out procedures. To this end, after a disconnect switch is opened, the switch can be locked in the open position and tagged (i.e., an actual tag is placed on the lock identifying the operator) by the operator who locked the switch to ensure that
20 the switch remains open.

While the master disconnect switch 324 is advantageous, a system including only a master switch 324 is disadvantageous for several reasons. First, as indicated above, typically the switch is located at a master control panel 324 which may be remote from an access point. In this case, once the
25 operator recognizes a problem which requires operator intervention, the operator has to halt line operation, run to the master control panel 324, open the master disconnect switch 334, lock out and tag the switch 334, perform a lockout/tag out power off verification to ensure lockout and tag out, walk back to the problem station 312, access the station 312 to eliminate the problem,
30 walk back to the control panel 324, untag and unlock the disconnect switch 334, close the switch 334 and then start the process once again. While this process may not seem burdensome where a processing line is relatively short (e.g., 10 stations long), this process is extremely burdensome in cases where

a line may have many stations which may be up to 3000 or more feet from the master control panel 324 where problems occur routinely (e.g., several times per operator shift).

In addition to being burdensome, this process is also relatively
5 expensive for two reasons. First, employee time is expensive and any
process which requires an employee to traverse from one point to another
without being productive reduces processing line efficiency. Second, during
the time when the line is powered down, output is stalled. The time required
to travel to and from the disconnect switch reduces line output. While this
10 may be relatively unimportant in cases where inexpensive products are being
processed, down time and the resulting production loss is extremely important
where expensive products (e.g., vehicles, etc.) are being manufactured.

Second, the electrical contacts on typical disconnect switches
effectively wear out over the course of a relatively short life time. For
15 example, Underwriter's Laboratories mandates 10,000 operations and good
disconnect switches last for approximately twenty thousand switching cycles
prior to required replacement.

Third, disconnect switches are purposefully designed such that an
extremely large force is required to open or close the switch. Such a design
20 substantially reduces the possibility of inadvertent switching. Unfortunately,
the required force also places excessive stresses on the disconnect switch
mechanical components which often cause mechanical failure (e.g.,
breakage).

To address the shortcomings of systems which include a single master
25 disconnect switch, the industry has developed a voltage supervision relay
(VSR) based system for locally cutting off power to a station thereby
electrically isolating the station. To this end, referring to Fig. 1, an exemplary
system 10 is illustrated in the context of a station or hazard 12 which is linked
to three voltage supply lines L1, L2 and L3. For each hazard 12, system 10
30 includes an isolation relay, a VSR, a system lockout switch (SLS) 18 and a
safety light 20.

SLS 18 includes first and second contacts 22 and 24 which are mutually exclusive (i.e., when one contact 22, 24 is closed, the other 22 or 24 is open and vice versa).

The VSR includes, among other things, voltage sensing and
5 comparison hardware and a VSR coil represented by a VSR block 16 and two normally open (NO) contacts VSR-1 and VSR-2. The isolation contactor includes a coil and positively guided contacts including three NO contacts IC-1, IC-2 and IC-3 and one normally closed (NC) contact IC-4.

Lines L1 and L2 are used to provide power to VSR block 16, coil 14
10 and light 20. To this end, line L1 forms a voltage rail 26 while line L2 forms a voltage rail 28. Contacts VSR-1 and VSR-2 are in series with SLS contact 22 and safety light 20 between rails 26 and 28. Similarly, SLS contact 24 is in series with coil 14 between rails 26 and 28.

Block 16 is linked between each of contacts IC-1, IC-2 and IC-3 and
15 hazard 12 for sensing voltage thereat. Contact IC-4 is linked to block 16 as an enabling contact. Block 16 only operates when contact IC-4 is closed. After sensing voltages, block 16 compares the sensed voltages to a threshold voltage (e.g., 10 volts) to determine if power is being provided to hazard 12. Where power is provided to hazard 12, current is not provided to the VSR coil
20 and therefore contacts VSR-1 and VSR-2 remain open. Where power is not provided to hazard 12, current is provided to the VSR coil and therefore contacts VSR-1 and VSR-2 both close.

Referring still to Fig. 1, during normal operation, SLS 18 is in an ON position wherein contact 22 is open and contact 24 is closed. In this case
25 current passes through isolation coil 14 so that contacts IC-1, IC-2 and IC-3 are closed and contact IC-4 is open. Because contact 22 is open, light 20 is off.

Next, assuming a process malfunction associated with hazard 12 causes a problem which must be eliminated by an operator, first the operator
30 locally turns off the motor drive. Second, the operator locally (i.e., proximate hazard 10 and the process malfunction) turns SLS 18 from ON to OFF thereby opening contact 24 and closing contact 22. When contact 24 is

opened, current to coil 14 is cut off such that contacts IC-1, IC-2 and IC-3 are all opened while contact IC-4 is closed thereby enabling block 16.

Because each of contacts IC-1, IC-2 and IC-3 are all open, VSR block 16 should not sense a voltage above the threshold voltage. On one hand, where the sensed voltages are below the threshold voltage, block 16 energizes the VSR coil and hence closes contacts VSR-1 and VSR-2 causing light 20 to illuminate. Illuminated light 20 indicates that hazard 12 has been electrically isolated and that entry through an associated access point should be safe. After lockout and tag out procedures, the operator can enter hazard 12 to eliminate the problem.

On the other hand, where block 16 senses one or more voltages which are greater than the threshold voltage, block 16 does not energize the VSR coil and hence contacts VSR-1 and VSR-2 remain open despite closed switch 22. In this case, light 20 is not illuminated and the operator knows it is not safe to service hazard 12.

This VSR system works well but has two primary shortcomings. First, VSR block 16 is relatively expensive and increases system costs appreciably over the simple disconnect switch configuration.

Second, the VSR is not field repairable, is difficult to understand and is difficult to trouble shoot.

Therefore, a need exists to provide a safe and relatively inexpensive system for remotely (e.g., locally) electrically isolating machines or processing/manufacturing line hazards. Preferably the such a system would ensure that no current or voltage is provided to a hazard during lockout conditions.

BRIEF SUMMARY OF THE INVENTION

To overcome the shortcomings described above, the present invention includes a method wherein, when electrical isolation for a machine, station or manufacturing line has been selected by a system operator, in addition to disconnecting voltage supply lines from the machine, device, etc., the lines are also linked to a grounding node to ensure that no power is provided. In

addition, preferably, the method includes monitoring the ground node to ensure that the ground node remains grounded. Where the lines have been linked to the ground node and the ground node is in fact grounded, an indicator, preferably in the form of a light, indicates a safe device, machine,
5 etc.

Also, preferably, the isolation selection mechanism and indicator corresponding to a specific device, machine, station, etc., is located proximate the station for easy and expedited access.

In addition to the method, the invention also includes an apparatus
10 which is used to perform the method.

Thus, one object of the invention is to provide a machine isolation mechanism which ensures electrical isolation when electrical isolation is selected.

Another object of the invention is to achieve the aforementioned object
15 in a relatively inexpensive manner. To this end, the preferred relay and switching configuration described herein is considered advantageous.

One other object is to ensure that a grounding node is actually grounded thereby further ensuring that no power is provided to a station after electrical isolation has been selected.

Yet another object of the invention is to provide a system which
20 enables local selection of electrical isolation. To this end, a separate isolation selector and indicator can be provided at each of several different stations along a manufacturing line thereby facilitating local isolation.

One other object is to enable single failure detection of a failed contact
25 and require system maintenance when a single failure occurs. The inventive system includes positively guided contactors and relays as well as safety relays which, upon a single open or closed contact failure, electrically isolate the station or stations associated with the failed contact and which will not allow the system which supplies power to the isolated stations(s) to the reset
30 without maintenance to repair the failed contact.

These and other objects, advantages and aspects of the invention will become apparent from the following description. In the description, reference is made to the accompanying drawings which form a part hereof, and in which

there is shown a preferred embodiment of the invention. Such embodiment does not necessarily represent the full scope of the invention and reference is made therefor, to the claims herein for interpreting the scope of the invention.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

- 5 Fig. 1 is a schematic view of a prior art isolation system; and
 Fig. 2 is a schematic diagram illustrating the inventive isolation system;
 Fig. 3 is a flow chart illustrating a preferred method according to the present invention;
 Fig. 4 is a schematic diagram of an exemplary manufacturing line
10 including hardware consistent with prior art disconnect configurations; and
 Fig. 5 is a schematic diagram similar to Fig. 4, albeit illustrating a manufacturing line including an inventive disconnect configuration.

DETAILED DESCRIPTION OF THE INVENTION

- 15 Referring now to the drawings and, specifically, referring to Fig. 5, the invention will be described in the context of an exemplary manufacturing line 400 which is similar to line 300 illustrated in Fig. 4, albeit including additional inventive grounding and remote isolation hardware. Line 400 includes ten stations 402, 404, 406, 408, 410, 412, 414, 416, 418 and 420 spaced along
20 the length of a conveyor 422 for performing various sub-processes on work items moved therealong. A motor which drives conveyor 422 is powered by a variable frequency drive 438 or other controls. Power and controls for stations 402 through 420 are collectively identified by numeral 430.

- A main or master control panel 424 receives power on three supply
25 lines collectively identified by numeral 326 and provides power to line components which require power. Panel 424 includes miscellaneous panel control 450, a main or master disconnect switch 434 and a ground isolation system (GIS) 452. Main disconnect 434 links supply lines 426 to GIS 452, power provided to GIS 452 via lines L1, L2 and L3. GIS 452 links lines L1, L2
30 and L3 to each of VFD 438 and controls 430. Collectively VFD 438, controls

430 and hardware controlled thereby is referred to as hazard 52. Thus, hazard 52 includes a manufacturing line which has a plurality of stations, each station having a plurality of different devices which cooperate to perform some tasks on a work item. For example, the devices may include motors, drills, mills, gluing, cooking, riveting, welding, drying, stirring, painting, cleaning, members, etc.

Referring still to Fig. 5, each station 402 through 420 includes a station distinct remote lock-out switch (RLS) RLS-1, RLS-2, RLS-3, RLS-4, RLS-5, RLS-6, RLS-7, RLS-8, RLS-9 and RLS-10, respectively. GIS 452 and RLSs 1 through 10 will collectively be referred to as an electrical isolation system 50.

Referring now to Figs. 2 and 5, as described above, hazard 52 is linked via exemplary and inventive isolation system 50 to the three voltage supply lines L1, L2, and L3. When an operator elects to link lines L1, L2 and L3 to intermediate nodes 60, 62 and 64 voltage is provided to hazard 52.

Hereafter it will be assumed that a motor at one particular station 402 is for moving a rivet gun into a position to rivet two pieces of sheet metal together.

System Hardware

Electrical isolation system 50 includes a plurality of components which cooperate to enable a user to either provide power to hazard 52 or, in the alternative, to cut off power to hazard 52 and ground intermediate nodes 60, 62 and 64 (see Fig. 2). When nodes 60, 62 and 64 are grounded, an operator may access any of the stations associated with hazard 52 via access locations after a lockout-tagout operation has been performed to ensure that power is not again provided to the specific station. To verify that power at a specific station has been cut off, indicators, preferably in the form of lights (e.g., see 90 in Fig. 2) , are provided proximate each access location. When an access location light is lit, it is safe to enter the corresponding station. Similarly, when an access location light is not lit, the inventive system has identified an unsafe condition and the operator should not enter the station.

To facilitate the aforementioned functions, system 50 includes a plurality of relays, switches, fuses and indicator lights. A relay is a device which includes at least one coil and an associated contact. A contact is

essentially a two stage switch having a normal state (i.e., open or closed) and an excited state (i.e., the opposite of the normal state). A contact having a normally closed state is referred to as an NC contact while a contact having a normally open state is referred to as an NO contact. When current passes
5 through the coil, the relay changes contact states. Thus, when the coil is energized, the NC contacts open and NO contacts close. In many cases, a relay will include more than a single contact. For example, a relay may include three NO contacts and one NC contact or five NO contacts and one NC contact. In a relay having three NO contacts and one NC contact, when
10 the coil is energized, all three NO contacts close and the NC contact opens. With a relay, when a NO contact is welded closed, corresponding NC contacts cannot close and vice versa. This type of a relay is referred to as a positively guided relay.

As well known in the art, relays can be combined in specific
15 configurations to perform specific tasks. One special type of relay configuration is generally referred to as a safety relay configuration. A safety relay configuration typically includes, among other things, one or more relays, one or more NC emergency stop (ES) switches, a start switch and a logic power source. Typical configurations include both a control circuit or a safety
20 relay circuit and at least one output. The safety relay circuit is designed to effectively “determine” whether or not an operator wants power to be delivered to a device (e.g., a motor, another coil, etc.) based on a recent sequence of start and stop commands selected via start and ES switches.

The output is designed to either provide power to, or cut power off
25 from, the device based on operation of the safety relay circuit. To this end, an output typically includes two or more relay contacts (hereinafter “output contacts”) in series between a driving voltage source and the device, each of the output contacts having to be closed to provide power to the device.

The safety relay circuit is designed such that, when the start switch is
30 closed, the relay coils are energized causing the output contacts to close (thereby providing power to the device). The ES switches are arranged such that when the ES switches are opened, coil current is cut off and all properly operating contacts associated therewith change state (i.e., closed contacts

open and open contacts close). Thus, when the ES switches are open the output contacts open and power to the motor is cut off. After power is cut off, assuming properly operating contacts, power can again be provided by closing the start switch.

5 Referring still to Fig. 2, among other things, system 50 includes a safety relay circuit which includes a start button or switch 78, and an ES switch 80 and first and second relay configurations 76A and 76B, respectively. Switches 78 and 80 are linked to second configuration 76B. When the proper sequence of switches 78 and 80 is performed, output
10 contacts associated with configuration 76B are all closed.

With respect to a first safety relay configuration 76A, although not illustrated, the first configuration includes circuitry which monitors the integrity of cables which link remote lock-out switches to the safety relay control circuitry. To this end, the first safety relay configuration includes two relays
15 which are arranged in a manner similar to the configuration described above. In Fig. 2, output contacts corresponding to first safety relay configuration 76A are collectively specified by box 72. Output contacts corresponding to the first relay in the first configuration are identified by references IK1-m where m indicates a relay specific contact (i.e. m=1, 2 or 3) while contacts
20 corresponding to the second relay in the first configuration 76A are each identified by references 1K2-m where m again specifies a relay specific contact. Thus, each of the relays in the first safety relay configuration 76A include six NO contacts in box 72.

With respect to second safety relay configuration 76B, although not
25 illustrated, the second configuration includes circuitry which monitors switches 78 and 80 to determine when power should be provided to and cut off from hazard 52. Essentially second configuration 76B facilitates starting and emergency stop functions. To this end the second safety relay configuration 76B also includes two relays arranged in a manner similar to the configuration
30 described above. In Fig. 2, the output contacts corresponding to second safety relay configuration 76B are collectively specified by box 74. Output contacts 2K1 and 2K2 in box 74 correspond to the first and second relays in

the second relay configuration 76B, respectively (i.e. each of the second configuration relays only include a single NO output contact).

Referring still to Fig. 2, generally, the components of system 50 form a control configuration, a controller for controlling the control configuration and a grounding configuration. In addition to the contacts in safety relay boxes 72 and 74, the control configuration includes first and second isolation contactors and a control relay. A contactor is similar to a relay in that it has some combination of related NO and NC contacts and a coil. The difference between a relay and a contactor is that the contactor is designed to handle power while the relay is designed to handle logic level signals. The first isolation contactor includes four NO contacts IK1-1, IK1-2, IK1-3, and IK1-4, one NC contact IK1-5, and a first isolation coil I-1. Similarly, the second isolation relay includes three NO contacts IK2-1, IK2-2 and IK2-3, one NC contact IK2-4, and a second isolation coil I-2. The control relay includes one NO contact CR-1, two NC contacts CR-2 and CR-3 and a control relay coil CR.

The grounding configuration includes a ground contactor and a ground control relay. The ground contactor includes four NO contacts G-1, G-2, G-3 and G-4, one NC contact G-5, and a ground coil G. The ground control relay includes a single NO contact GC-1, and a ground control coil GC.

In addition to safety relay circuits 76 and switches 78 and 80, the controller includes remote lockout switches and system isolation indicators. Referring to Fig. 5, because line 300 includes ten stations, ten RLSs and corresponding indicators are provided. Nevertheless, referring to Fig. 2, to simplify this explanation only three RLSs, RLS1, RLS2 and RLS3, are illustrated along with corresponding indicators 90, 92 and 94. Indicators 90, 92 and 94 are preferably lights. In addition to the components described above, system 50 also includes a current limiting power supply 65, fuses 95, 96 and 97 and a transformer 66.

Referring still to Fig. 2, the above-described components are linked together as follows. A first isolation contactor contact IK1-1 is linked in series with a second isolation contactor contact IK2-1 and fuse 95 between voltage line L1 and node 60. Similarly, fuse 96 and contacts IK1-2 and IK2-2 are

linked in series between line L2 and node 62 while fuse 97 and contacts IK1-3 and IK2-3 are linked in series between line L3 and node 64. Hereinafter, contacts IK1-1, IK1-2, IK1-3, IK2-1, IK2-2 and IK2-3 will be referred to generally and collectively as "line contacts."

- 5 Ground contacts G-1, G-2 and G-3 are linked between intermediate nodes 60, 62 and 64, respectively, and a grounding node 100. Grounding node 100 is linked via an equipment grounding conductor (EGC) to ground. Ground control coil GC is linked between ground node 100 and line L3.

- 10 Transformer 66 includes a primary winding linked between lines L1 and L2 and a secondary winding which is linked between a ground rail 68 and a voltage rail 70.

- 15 First isolation coil I-1 is linked in series with a plurality of contacts between rails 68 and 70. Specifically, coil I-1 is linked in series with NO control relay contact CR-1, first safety relay configuration contacts 1K1-1 and 1K2-1, second safety relay configuration contacts 2K1 and 2K2, and NC ground contact G-5. One intermediate node 102 exists between boxes 72 and 74, and another intermediate node 104 is provided between first intermediate coil I-1 and contact G-5. Coil I-2 is linked in series with contact IK1-4 and contacts 1K1-2 and 1K2-2 corresponding to the first safety relay configuration 76A between intermediate nodes 102 and 104. Thus, coil I-2, like coil I-1, is in series with a plurality of contacts between rails 68 and 70.

- 20 First safety relay configuration output contacts 1K1-3 and 1K2-3 form a parallel contact pair and the pair is in series with control relay coil CR between rails 68 and 70. Ground coil G is in series with contacts IK2-4, IK1-5 and CR-2 between rails 68 and 70.

 Current limiting power supply 65 is linked to rails 68 and 70 and provides current limited rails to the controller components including a ground rail 110 and a voltage rail 112. An intermediate rail between rails 110 and 112 is identified by numeral 114.

- 30 Each of the remote lockout switches RLS1, RLS2 and RLS3 are similarly configured and operate in a similar manner and therefore only switch RLS1 will be explained here in detail. Switch RLS1 includes a pair of contacts 117 and 118 and another contact 116, pair 117 and 118 mutually

exclusive with respect to contact 116 (i.e., when contact 116 is closed contact pair 117 and 118 is open and vice versa). Each contact 116, 117 and 118 forms an open circuit and includes a closing member 120, 121, 122, respectively, for closing the corresponding open circuit. As illustrated, member 120 closes its corresponding circuit while members 121 and 122 open their corresponding circuits. Switch RLS1 is capable of two mutually exclusive states, including an ON state and an OFF state. Switch RLS1 is illustrated in the OFF state wherein member 120 closes contact 116 and members 121 and 122 form open circuits at contacts 117 and 118. In the alternative, when switch RLS1 is ON, member 120 forms an open circuit at contact 116 while members 121 and 122 close contacts 117 and 118.

Switch RLS2 includes a contact pair 131 and 132 and another contact 130 while switch RLS3 includes contact pair 135 and 136 and another contact 134. Contacts 118, 132 and 136 are linked in series between first safety relay configuration 76A terminals which must be shorted in order for configuration 76A to close corresponding contacts in box 72. Similarly, contacts 117, 131 and 135 are linked in series between a second pair of first safety relay configuration terminals which also must be shorted in order for configuration 76A to close corresponding contacts in box 72. Thus, when each of contacts 117, 118, 131, 132, 135 and 136 are closed, if all of the first safety relay configuration contacts operate properly, each of the first safety relay configuration contacts (i.e., the contacts in box 72) close.

Each of RLSs RLS1, RLS2 and RLS3 is a lock-out/tag-out switch which, upon being opened can be locked out and tagged out in a conventional manner.

First contact 116 is linked in series with indicator 90 between rails 110 and 114. Similarly, contact 130 is linked in series with indicator 92 between rails 110 and 114 while contact 134 is linked in series with indicator 94 between rails 110 and 114. Contacts CR-3, GC-1 and G-4 are linked in series between rail 112 and intermediate rail 114.

Referring still to Fig. 2, preferably ground coil G is mechanically linked to isolation coils I-1 and I-2 such that ground coil G cannot alter the states of corresponding contacts (i.e., G-1, G-2, etc.) while either of coils I-1 or I-2 or

both I-1 and I-2 are altering states of their corresponding contacts. In other words contactor G and contactors I-1 and I-2 are mutually exclusive.

Operation

Referring still to Fig. 2, in operation, with each of switches RLS1, RLS2
5 and RLS3 in their ON positions such that contacts 117, 118, 131, 132, 135
and 136 are closed and first contacts 116, 130 and 134 are open, when
switches 78 and 80 are manipulated by an operator in an effort to provide
power to hazard 52, all of the safety relay output contacts (i.e. contacts in
boxes 72 and 74) are closed. In this case, control relay coil CR is energized
10 such that control relay contact CR-1 is closed and contacts CR-2 and CR-3
are both open. Thus, all of the contacts in series with coils I-1 and I-2 are
closed and each of coils I-1 and I-2 are energized. As current flows through
coils I-1 and I-2, all of the line contacts (i.e., IK1-1, IK1-2, IK1-3, IK2-1, IK2-2
and IK2-3) close and power is provided to hazard 52 (i.e., referring also to
15 Fig. 5, power is provided to VFD 428 and controls 430 to drive motor 421 and
each of stations 402 through 420). In addition, isolation contacts IK2-4 and
IK1-5 are both open when coils I-1 and I-2 are energized.

Moreover, because each of the contacts IK2-4, IK1-5 and CR-2 is
open, ground coil G is not energized and therefore ground contacts G-1, G-2,
20 G-3 and G-4 remain open while contact G-5 remains closed. If the EGC is
actually grounded, voltage is applied across ground control coil GC and
therefore contact GC-1 is closed.

Furthermore, because each of contacts CR-3 and G-4 is open and
each of contacts 116, 130 and 134 is open, none of indicator lights 90, 92
25 and 94 are lit.

Next, it will be assumed that the process at the exemplary riveting
station (i.e., 402 in Fig. 5) malfunctions during system operation. It will also
be assumed that switch RLS1 and indicator light 90 are associated with
station 402. To this end, switch RLS1 and light 90 are located proximate
30 riveting station 402.

When the process malfunctions, an operator turns off the drive which
controls the process. Prior to entering the station, the operator must first

verify electrical isolation of that station (i.e., no power is being provided to any of the devices which together constitute the station). To verify electrical isolation of the station, the operator switches switch RLS1 from the ON position to the OFF position as illustrated in Fig. 2. When switch RLS1 is

5 turned OFF, member 120 closes contact 116 while members 121 and 122 open contacts 117 and 118. When members 121 and 122 open contacts 117 and 118, first safety relay configuration 76A causes each of the output contacts in box 72 to open. When contacts 1K1-1, 1K1-2, 1K1-3, 1K2-1, 1K2-2 and 1K2-3 open, voltage is cut off from each of coils I-1, I-2 and CR.

10 When voltage is cut off from coils I-1 and I-2, ideally each of the line contacts IK1-1, IK1-2, IK1-3, IK2-1, IK2-2 and IK2-3 is opened thereby cutting off power to nodes 60, 62 and 64. In addition, when voltage is cut off from coils I-1, I-2 and CR, contacts IK2-4, IK1-5 and CR-2 all close (i.e., each of those contacts is a NC contact) and ground coil G is energized. When

15 ground coil G is energized, contacts G-1, G-2, G-3 and G-4 all close and contact G-5 opens. When contact G-5 opens, an additional open circuit is provided in series with coils I1 and I2 to ensure power is cut off from nodes 60, 62 and 64. When contacts G-1, G-2 and G-3 are closed, each of intermediate nodes 60, 62 and 64 is linked to ground node 100. Thus, if

20 ground node 100 is actually linked to ground, no power can be applied to nodes 60, 62 and 64.

Referring still to Fig. 2, when node 100 is actually grounded, voltage is still applied across ground control coil GC and therefore contact GC-1 remains closed. However, if node 100 should, for any reason (e.g., contact

25 with an inadvertent power cable) be ungrounded, current is cut off from coil GC and contact GC-1 opens. Thus, after RLS1 is turned OFF, if all of the relays are working properly to ground nodes 60, 62 and 64 and if node 100 is actually grounded, each of contacts CR-3, GC-1 and G4 are closed. In addition, because member 120 is closed across contact 116, voltage is

30 provided between rails 110 and 112 which illuminates indicator 90. Therefore, indicator 90 lights up indicating that it is safe for the operator to enter the station to service the malfunctioning process. Similar operation occurs when either of switches RLS2 or RLS3 are turned OFF. Prior to

entering station 402 through an access point, switch RLS1 is locked out and tagged out to ensure safety. Illumination of light 90 verifies a locked out condition.

Industry accidents sometimes occur which could result in an
5 inadvertent short circuit of the control wiring to the switches RLS1, RLS2 and RLS3 of safety relay circuit 76A. For example, crushing the wires could result in a short across contacts 118, 132 and 136. Nevertheless, series contacts 117, 131 and 135 provide a redundancy such that, even if contacts 118, 132 and 136 are shorted, configuration 76A will still operate to isolate hazard 52
10 and prevent the system isolation light from coming on when any one of switches 116, 130 or 134 is turned OFF and the resetting of the contactors is prevented.

It should be appreciated that while the configuration of Fig. 2 is a preferred embodiment which is advantageous because of its simple, relatively
15 inexpensive and exceedingly robust design, the invention contemplates a relatively broad method which is independent of the hardware configuration used to facilitate the method. To this end, referring to Fig. 3, an exemplary method according to the present invention is illustrated. Although not illustrated, it is contemplated that a processor could perform the inventive
20 method and, and in this regard, one embodiment of an exemplary processor is system 50 (see Fig. 2).

Referring still to Fig. 3, at decision block 200 the processor determines if an operator has selected a station for electrical isolation. If the station has not been selected for isolation, the processor enters a monitoring loop until
25 selection is identified. Where electrical isolation has been selected, at process block 202 the processor links the motion bus nodes 60, 62 and 64 (see Fig. 2 again) to ground node 100.

At decision block 204 the processor determines if ground node 100 is actually grounded (i.e., in Fig. 2 this is accomplished by coil GC and contact
30 GC-1). If node 100 is not grounded, at block 206 the processor indicates an unsafe condition (e.g., will not light up a "system isolated" light). If node 100 is grounded, at block 208, the processor indicates a safe station (e.g., will light up a "system isolated" light).

It should be understood that the methods and apparatuses described above are only exemplary and do not limit the scope of the invention, and that various modifications could be made by those skilled in the art that would fall under the scope of the invention. For example, while the preferred method
5 includes some mechanism for determining if a grounding node is actually grounded, the invention contemplates systems and methods which do not include this feature.

In addition, the preferred system 50 (see Fig. 2) may be configured in many other ways. For instance, the safety relay output contacts may be
10 differently configured to include fewer or more redundancies.

To apprise the public of the scope of this invention, the following claims are made:

CLAIMS

What is claimed is:

1. A safety switching assembly for linking voltage lines to device input nodes and for selectively and remotely electrically isolating the device, the apparatus comprising:

- 5 a control configuration for selectively linking and delinking the voltage lines to and from the device, respectively;
- a controller for controlling the control configuration; and
- a grounding configuration for, when the voltage lines are delinked from the device, linking the input nodes to ground.

2. The assembly of claim 1 wherein the control configuration includes an isolation contactor including one normally open (NO) isolation contact for each voltage line and including an isolation coil, each isolation contact linking an associated line to a separate intermediate node adjacent the device, the controller controlling provision of current to the isolation coil.

3. The apparatus of claim 2 wherein the isolation contactor also includes one normally closed (NC) isolation contact and wherein the grounding configuration includes one NO ground contact for each line and a ground coil, each ground contact linking a separate one of the intermediate nodes to ground, the ground coil in series with the NC isolation contact and a power source.

4. The apparatus of claim 3 wherein the controller includes at least one safety contact in series with the isolation coil and a switch for opening and closing the safety contact.

5. The apparatus of claim 4 further including an indicator in series with the switch which, when current passes therethrough, indicates current flow.

6. The apparatus of claim 5 wherein the indicator is a light.

7. The apparatus of claim 5 further including an additional NO ground contact in series with the switch and the indicator.

8. The apparatus of claim 7 further including a ground conductor linked between ground and a grounding node, each ground contact linked to the grounding node, a ground control relay including a ground control coil and a NO ground control contact, the ground control coil linked between the
5 grounding node and one of the voltage lines, the ground control contact linked in series with the switch, the indicator and the ground contact in series with a power source.

9. The apparatus of claim 3 further including a ground conductor linked between ground and a grounding node, each ground contact linked to the grounding node, a ground control relay including a ground control coil and a NO ground control contact, the ground control coil linked between the
5 grounding node and one of the voltage lines, the ground control contact linked in series with a power source.

10. The apparatus of claim 4 wherein the safety contact is a first safety contact, the apparatus further including a second NO safety contact which is also controlled by the switch, a control relay including a first NO control relay contact and a control relay coil, the first and second safety
5 contacts forming a parallel contact pair, the pair in series with the control relay and a power source.

11. The apparatus of claim 10 wherein the control relay contact is in series with the isolation coil and a power source.

12. The apparatus of claim 11 wherein the control relay further includes a first NC control relay contact in series with the ground coil.

13. The apparatus of claim 10 wherein the control relay further includes a second NC control relay contact in series with the switch.

14. The apparatus of claim 10 wherein the control relay contact is in series with the ground coil.

15. The apparatus of claim 10 wherein the control relay contact is in series with the switch.

16. The apparatus of claim 3 wherein the isolation contacts are first isolation contacts and the apparatus further includes a second isolation contactor including a separate NO second isolation contact for each voltage line and a second isolation coil, each second isolation contact in series with a
5 separate one of the first isolation contacts, the control circuit also for controlling current to the second isolation coil.

17. The apparatus of claim 3 wherein the ground coil is mechanically linked to the isolation coil such that closure of the ground coil and the isolation coil are mutually exclusive.

18. A safety switching apparatus for linking voltage lines to a device and for selectively and remotely electrically isolating the device, the apparatus comprising:

first and second voltage rails;

5 an isolation contactor including one normally open (NO) isolation contact for each voltage line and including an isolation coil, each isolation contact linking an associated line to a separate intermediate node adjacent the device, the isolation contactor also including one normally closed (NC) isolation contact;

10 at least one safety contact in series with the isolation coil between the rails;

a control circuit for controlling the at least one safety contact;

15 a ground contactor including one NO ground contact for each line and including a ground coil, each ground contact linking a separate one of the intermediate nodes to ground, the ground coil in series with the NC isolation contact between the rails; and

a switch linked to the control circuit for closing and opening the safety contact.

19. A safety switching method to be used with a device which is supplied voltage on voltage supply lines, the method for ensuring that the device has been electrically isolated when electrical isolation is selected, the method comprising the steps of:

- 5 determining when device isolation has been selected; and
 grounding the supply lines.

20. The method of claim 19 further including the step of indicating via the indicator that the supply lines have been grounded.


21. The method of claim 19 also for use with a grounding conductor wherein the step of grounding includes the step of linking the supply lines to
5 the grounding conductor and wherein the method further includes the steps of
 monitoring the grounding conductor to ensure that the conductor remains
 grounded and, if the grounding conductor is ungrounded, indicating the
 ungrounded condition via the indicator.

22. A safety switching system for use with a manufacturing line which includes a plurality of stations, the plurality linkable to voltage supply lines at input nodes, each station having an access, the system for remotely facilitating electronic isolation of the plurality and for indicating said isolation
- 5 on an access by access basis, the system comprising:
- a control configuration for selectively linking and delinking the voltage lines to and from the plurality, respectively;
 - a grounding configuration for, when the voltage lines are delinked from the plurality, linking the input nodes to ground;
 - 10 a switch for and positioned proximate each access, each switch positionable in at least a first position wherein the switch causes the control configuration to link the voltage lines to the plurality and a second configuration wherein the switch causes the control configuration to delink the voltage lines from the plurality; and
 - 15 an indicator for and positioned proximate each access, each indicator indicating electrical isolation of a corresponding station when a switch associated with the corresponding station is in the second position and the lines are grounded.

ABSTRACT OF THE DISCLOSURE

A system for electrically isolating and indicating electrical isolation of a machine including a plurality of relays which cooperate to, when electrical isolation is selected, ground voltage input lines to the machine thereby ensuring that no power is provided to the machine during operator access thereto.

553260 52420450

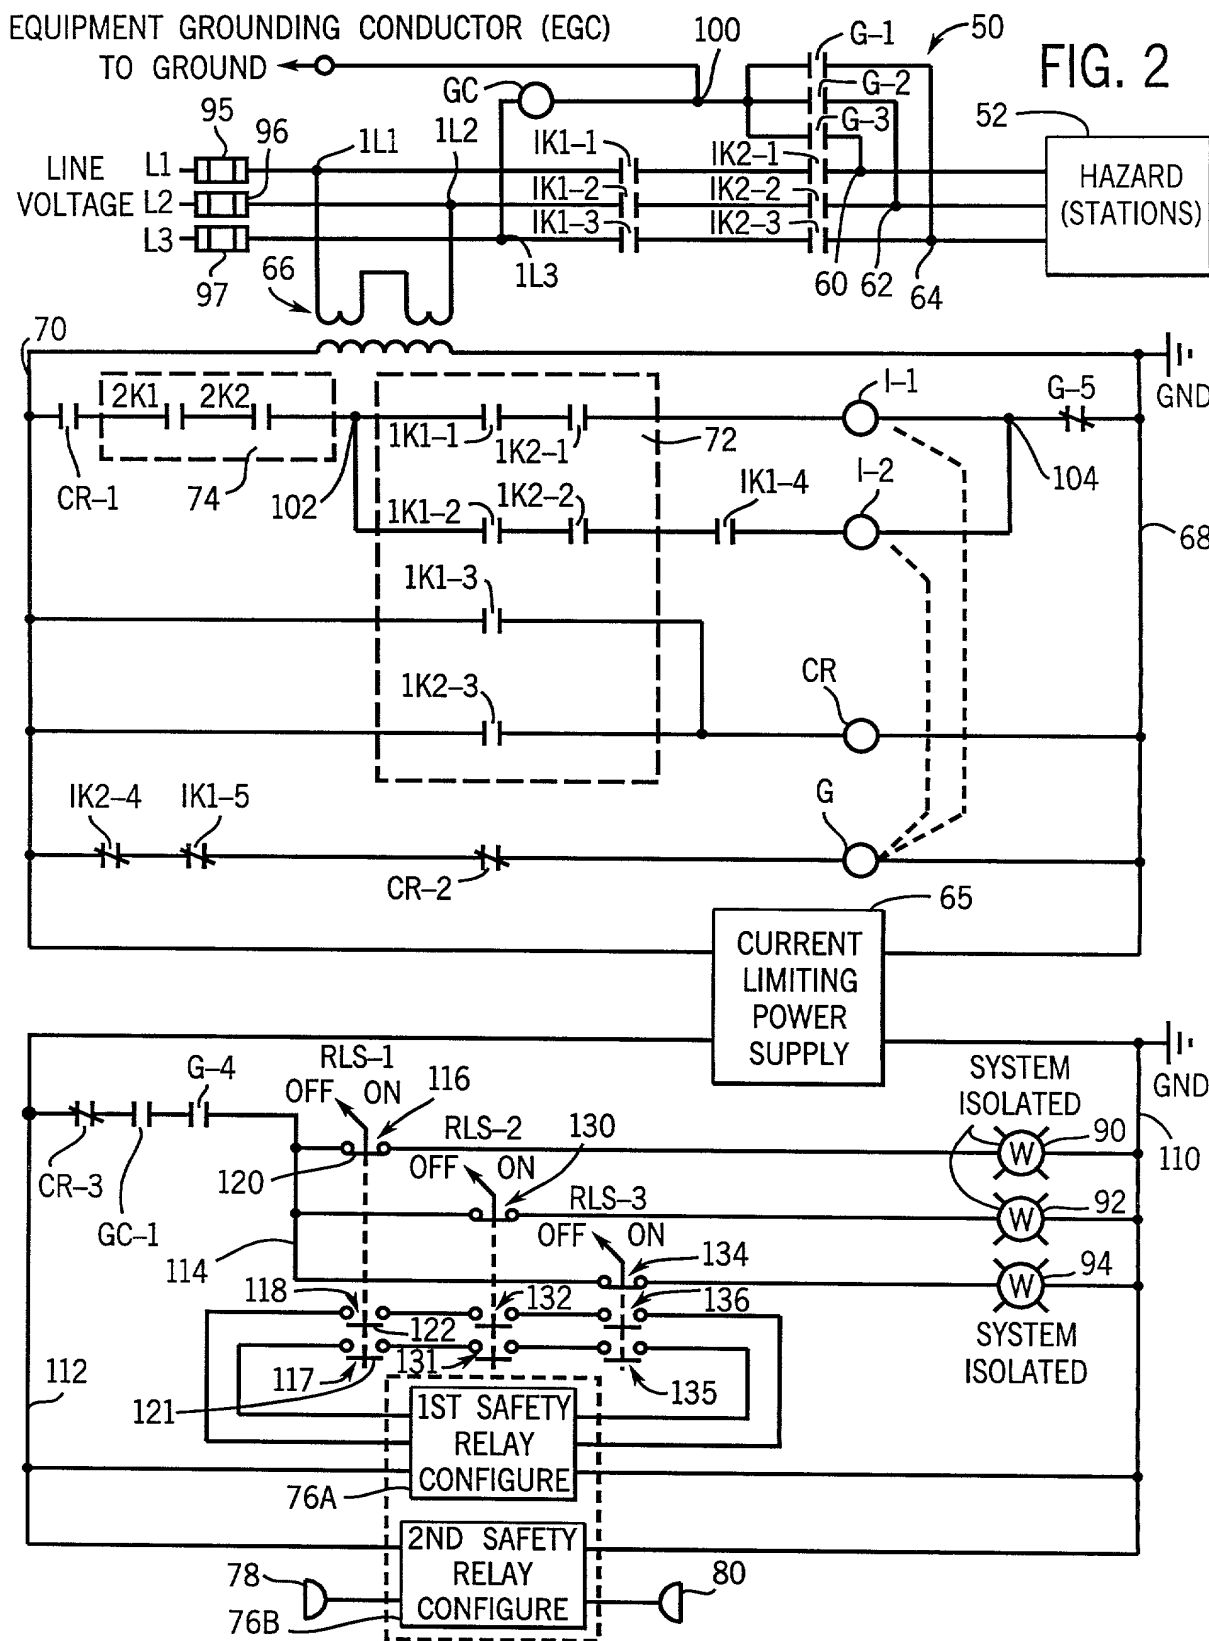

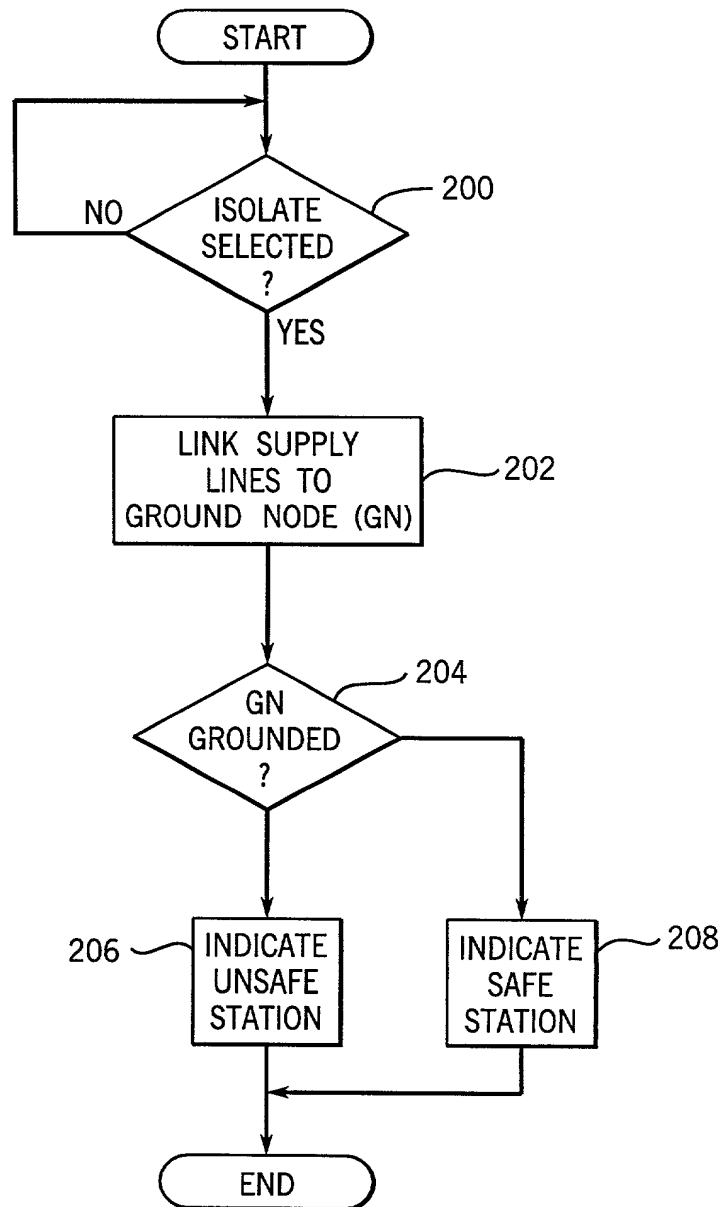


FIG. 3

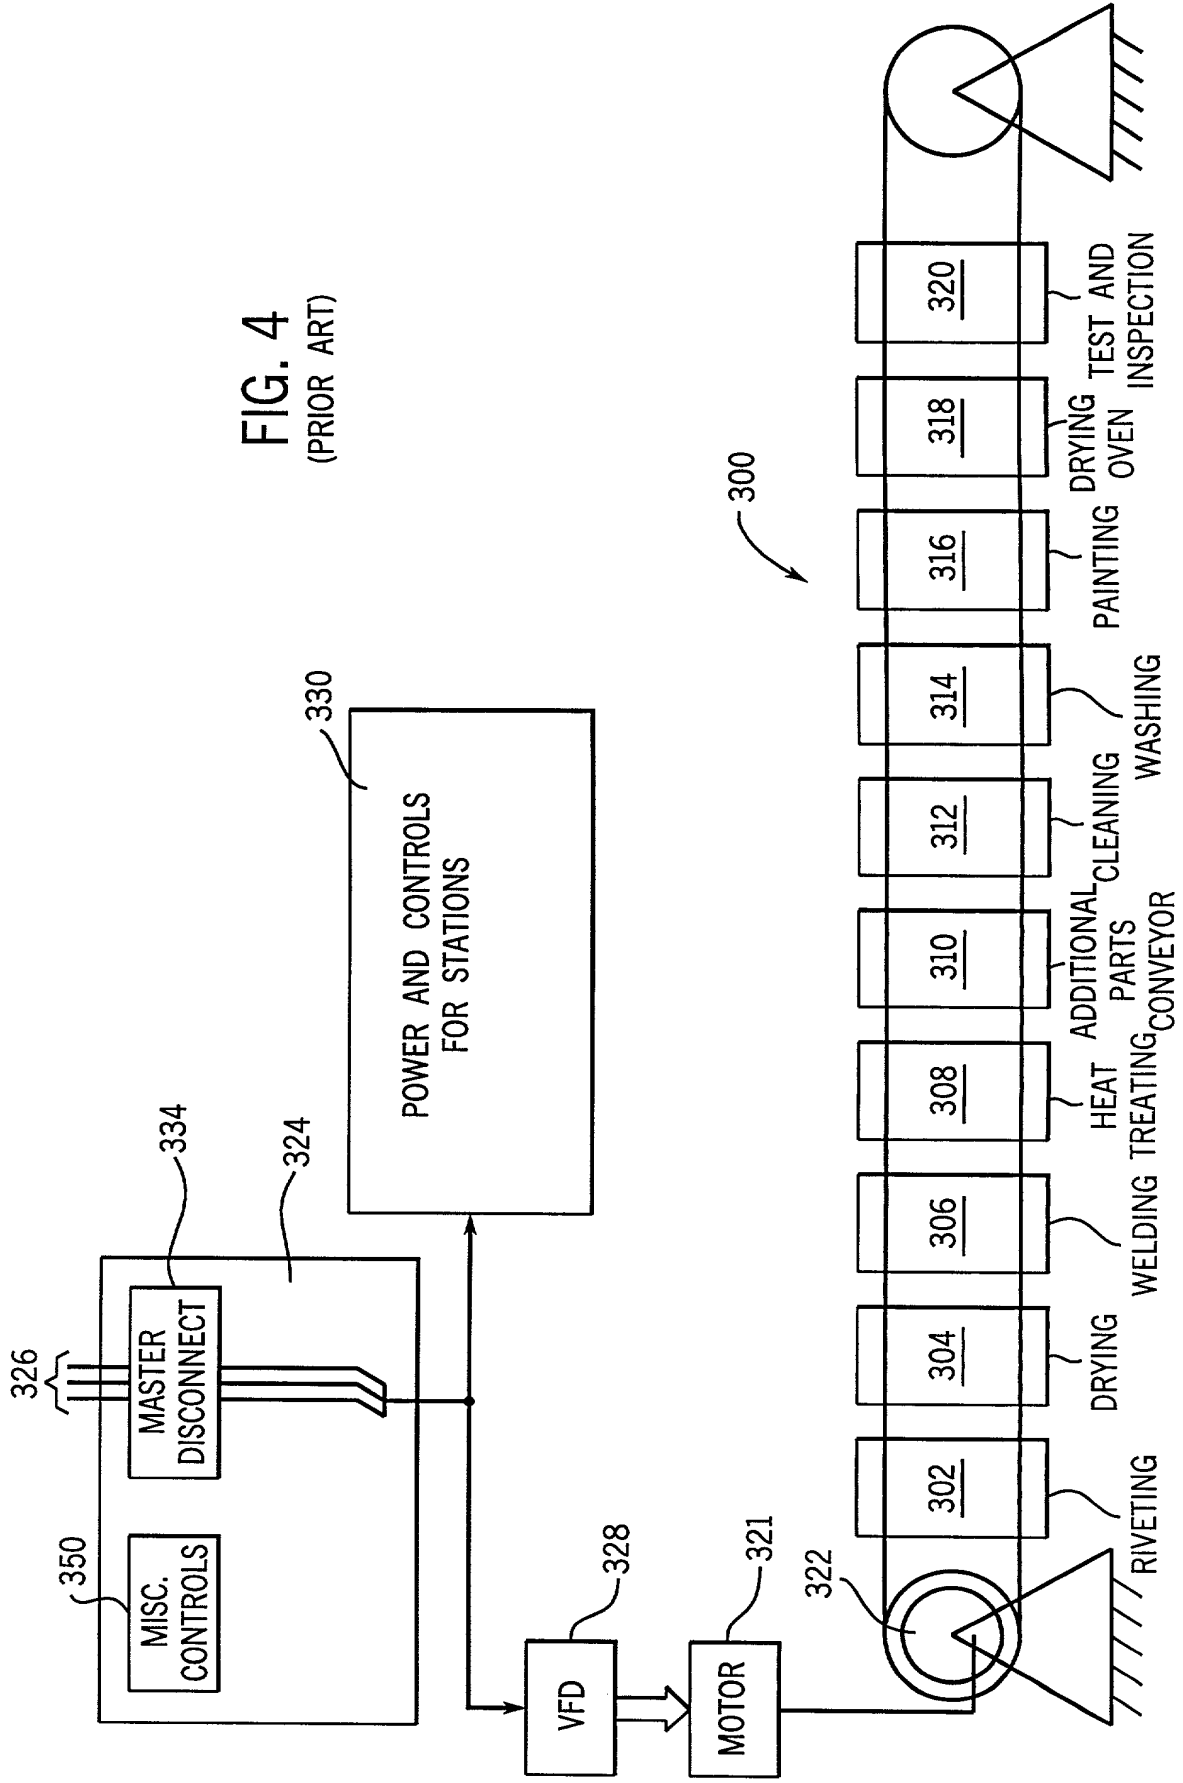


FIG. 4
(PRIOR ART)

+

+

+

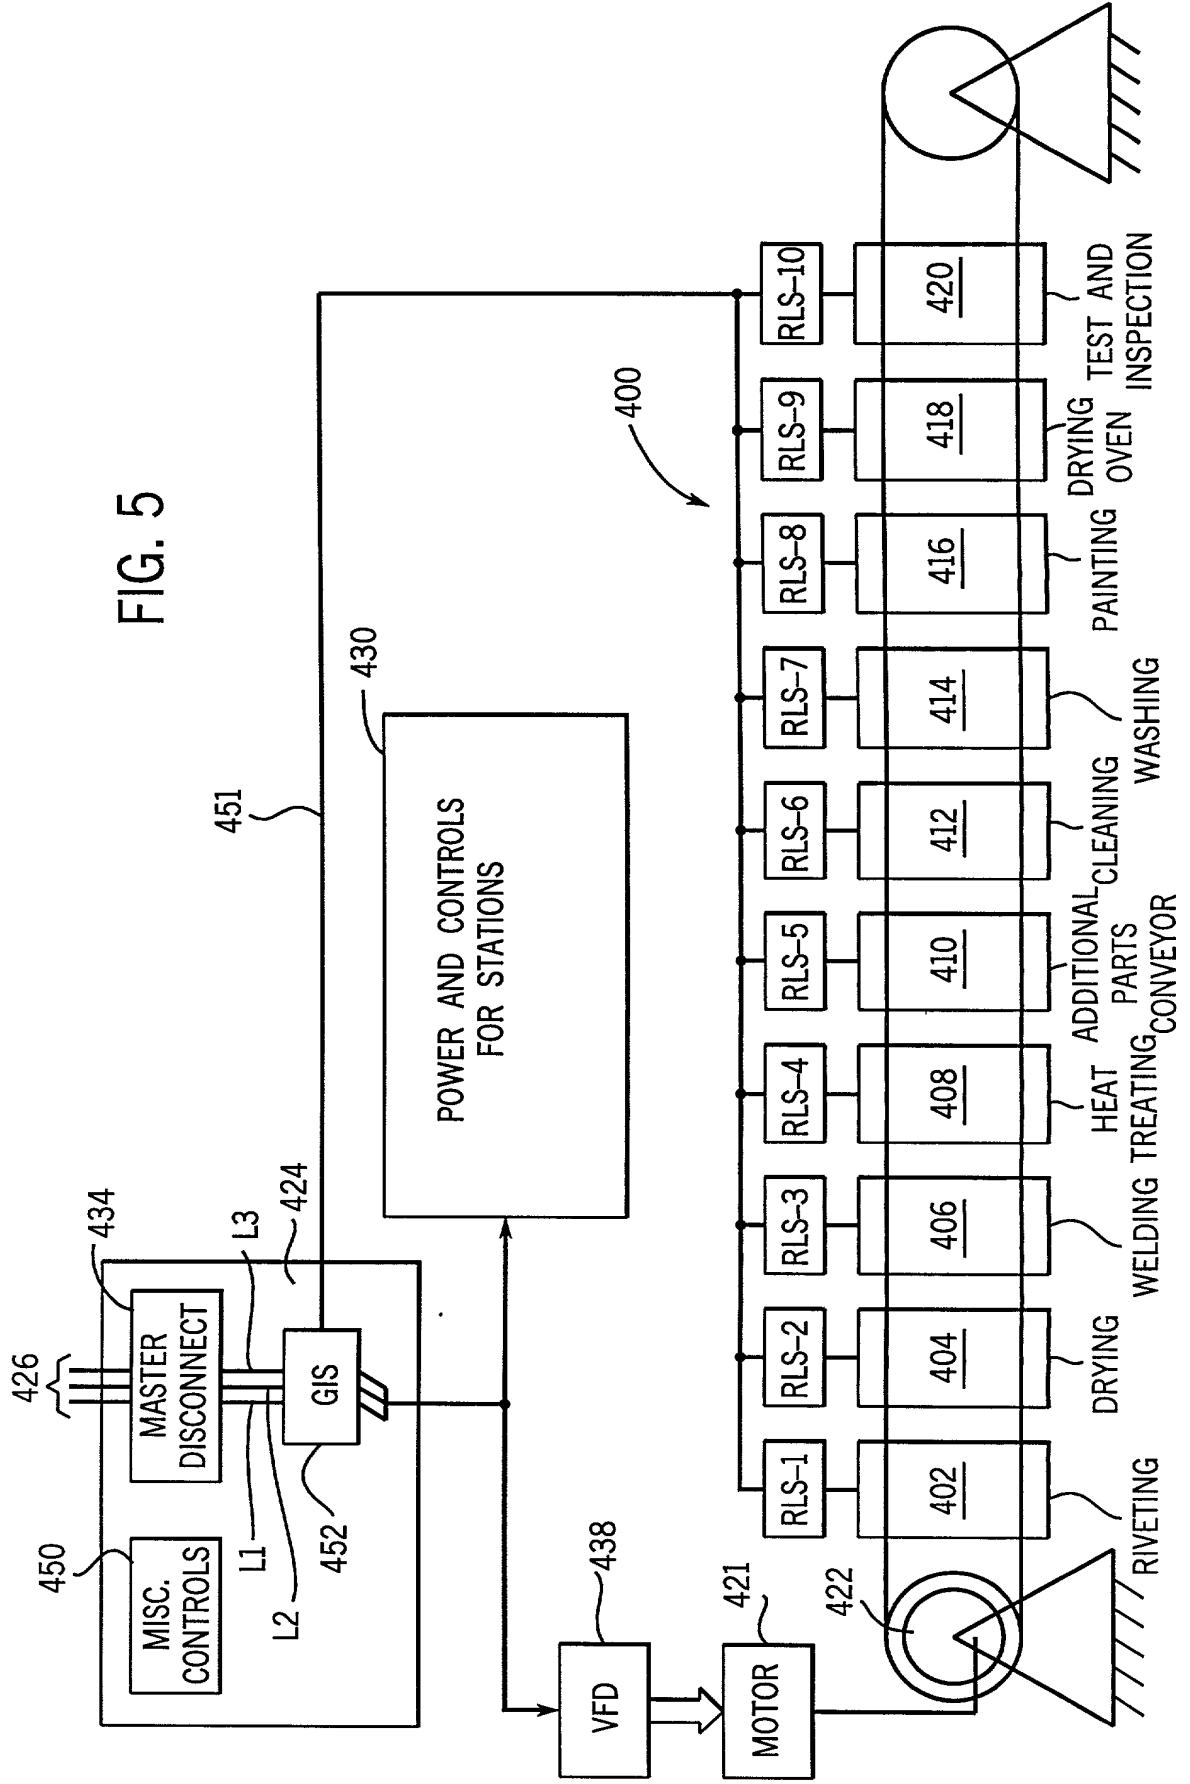


FIG. 5

+

EXPRESS MAIL LABEL NO. EJ800784686US

PTO/SB/01 (6-95)

Approved for use through 9/30/98. OMB 0651-0032

Please type a plus sign (+) inside this box ☐

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION <input checked="" type="checkbox"/> Declaration Submitted with Initial Filing OR <input type="checkbox"/> Declaration Submitted after Initial Filing	Attorney Docket Number	99AB133
	First Named Inventor	William J. Mayer
	COMPLETE IF KNOWN	
	Application Number	
	Filing Date	Herewith
	Group Art Unit	
	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

GROUNDING ISOLATION SYSTEM

(Title of the Invention)

the specification of which

☒ is attached hereto

OR

☐ was filed on (MM/DD/YYYY)

as United States Application Number or PCT International

Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate or §365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached? YES NO
			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

☐ Additional foreign applications numbers are listed on a supplemental priority sheet attached hereto:

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

Burden Hour Statement: This form is estimated to take .4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

4432556 110003.96773

Please type a plus sign (+) inside this box ☐

DECLARATION

Page 2

I hereby claim benefit under Title 35, United States Code §120 of any United States application(s), or §365(C) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application or PCT international application in the manner provided in the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application Number	PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority sheet attached hereto

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and all continuation and divisional applications based thereon, and to transact all business in the Patent and Trademark Office connected therewith:

☐ Firm Name Customer Number or label
 OR
☒ List attorney(s) and/or agent(s) name and registration number below

Name	Registration Number
Keith M. Baxter	31,233
Michael A. Jaskolski	37,551
John J. Horn	28,803
John M. Miller	38,560
William R. Walbrun	37,464

☐ Additional attorney(s) and/or agents named on a supplemental priority sheet attached hereto

Please direct all correspondence to ☐ Customer Number or label OR ☒ Fill in correspondence address below




Name	John J. Horn, Esq.				
Address	Allen-Bradley Company, Patent Dept. 704P				
Address	P.O. Box 2086, 8th Floor, T-29				
City	Milwaukee	State	WI	Zip	53201-9814
Country	USA	Telephone	(414) 382-3960	Fax	(414) 382-3900

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Name of Sole or First Inventor:		A petition has been filed for this unsigned inventor			
Given	William	Middle	J.	Family	Mayer
Suffix					
Inventor's Signature	<i>William J. Mayer</i>				Date
					9/24/99
Residence:	Hales Corners	State	WI	Country	US
Citizenship	US				
Post Office	11417 W. Parkview Lane				
Post Office					
City	Hales Corners	State	WI	Zip	53130
Country	US				Applicant Authority
<input checked="" type="checkbox"/> Additional inventors are being named on supplemental sheet(s) attached hereto					

53250" 340450

Please type a plus sign (+) inside this box ☐

DECLARATION										ADDITIONAL INVENTOR(S) Supplemental Sheet													
Name of Additional Joint Inventor, if any:										A petition has been filed for this unsigned inventor													
Given	Douglas					Middle			Family	Cleereman					Suffix								
Inventor's											Date	9/21/99											
Residence:		Greendale					State	WI		Country	US					Citizenship	US						
Post Office		4398 Skylark Lane																					
Post Office																							
City	Greendale					State	WI		Zip	53129					Country	US					Applicant Authority		
Name of Additional Joint Inventor, if any:										A petition has been filed for this unsigned inventor													
Given	David					Middle Initial			Family Name	Fisher					Suffix								
Inventor's											Date	9/21/99											
Residence:		Brookfield					State	WI		Country	US					Citizenship	US						
Post Office		15535 St. Therese Blvd.																					
Post Office																							
City	Brookfield					State	WI		Zip	53005					Country	US					Applicant Authority		
Name of Additional Joint Inventor, if any:										A petition has been filed for this unsigned inventor													
Given	Milan					Middle			Family	Damjanovich					Suffix								
Inventor's											Date	9-21-99											
Residence:		Milwaukee					State	WI		Country	US					Citizenship	US						
Post Office		4722 W. Anthony Drive																					
Post Office																							
City	Milwaukee					State	WI		Zip	53213					Country	US					Applicant Authority		
Name of Additional Joint Inventor, if any:										A petition has been filed for this unsigned inventor													
Given						Middle			Family						Suffix								
Inventor's											Date												
Residence							State			Country						Citizenship							
Post Office																							
Post Office																							
City						State			Zip						Country						Applicant Authority		
Additional inventors are being named on supplemental sheet(s) attached hereto																							

5532250 5474060